



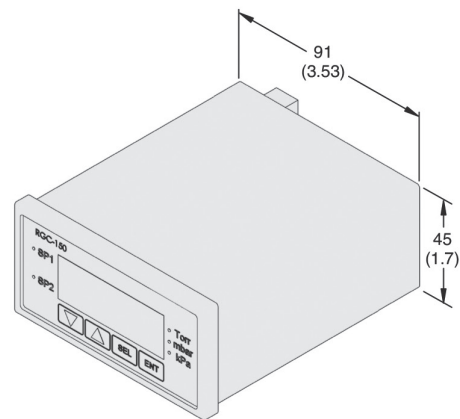

WWW.JEVINSTRUMENTS.COM

RGC-150 Rough Vacuum Gauge Controller

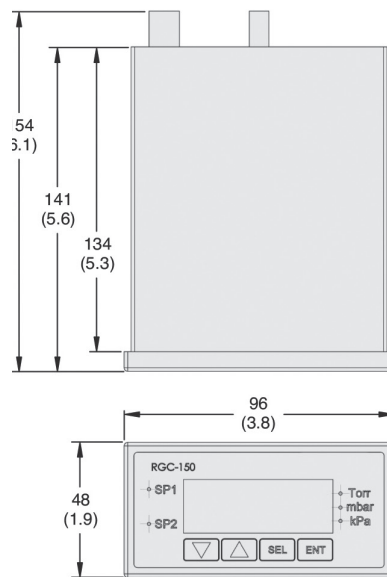

Dimensions: millimeters (inches)

Agilent's rough vacuum gauge controllers are a cost-effective solution for pressure measurement in the 1×10^{-3} to 760 Torr (1.3×10^{-3} to 1013 mbar) range. The RGC-150 package includes the Thermocouple gauge tube, sensor cables, and power supplies.

These vacuum gauge controllers are a perfect precalibrated, turnkey solution in a wide range of applications: general vacuum measurement in the rough vacuum range, monitoring forelines, chamber evacuation, and crossover to high vacuum pumps.

Features	Benefits
RGC-150 and Agilent 531 or 536 thermocouple gauge are pre-calibrated as a set at the factory	No calibration required at initial setup
Two easily configured set points	Utilize pressure readings to perform critical operations
Runs on 100-240 VAC, 50/60 Hz and displays in Torr, mbar and kPa	Globally compatible
Large bright LED display	Easily read from across a room or in dimly lit locations
Optional Ethernet connection and software that allows for remote monitoring through a web browser	Monitor vacuum performance from a remote location

NOTE Factory calibration is performed using equipment under NIST Standards. Calibration certificates are not available with these products.

Technical Specifications

Measurement range	1.3 x 10 ⁻³ to 1000 mbar (1.0 x 10 ⁻³ to 760 Torr)	
Accuracy	% of reading	Units
	±10%	1.3 x 10 ⁻³ to 1.3 mbar (1 milliTorr to 1 Torr)
	±15%	1.3 to 13.3 mbar (1 to 10 Torr)
	±50%	13.3 to 213 mbar (10 to 160 Torr)
	±25%	213 to 1000 mbar (160 Torr to 760 Torr)
Interface cable length	10 ft.	
Sensor	Agilent 531 or 536 Thermocouple Gauge	
Display	0.38 inch high 6 digit red LED	
Dimensions	1.7 inch high, 3.52 inch wide, 5.35 inch deep	
Analog output	0-5 VDC	
Supply voltage	100-240 VAC, 50/60 Hz	
Standards	CE, ROHS compliant	
Set point controls	7 A, 250 V	
Communication interface	RS-232	
Mounting	½ DIN rack mount	

Ordering Information

Description	Part Number
RGC-150 Controller, 531 TC 1/8 in NPT	RGC150
RGC-150 Controller, 531 TC 1/8 in NPT, Ethernet	RGC150E
RGC-150 Controller, 536 TC DN 16 ISO-KF	RGC150KF16
RGC-150 Controller, 536 TC DN 25 ISO-KF	RGC150KF25
RGC-150 Controller, 536 TC DN 16 CFF (1.33 in CFF)	RGC150CF
RGC-150 Controller, 536 TC DN 16 ISO-KF, Ethernet	RGC150EKF16
RGC-150 Controller, 536 TC DN 25 ISO-KF, Ethernet	RGC150EKF25
RGC-150 Controller, 536 TC DN 16 CFF (1.33 in CFF), Ethernet	RGC150ECF
Accessories	
Replacement 531 thermocouple gauge, 1/8 in. NPT	F0472303
Replacement 536 thermocouple gauge, DN 16 ISO-KF	L6141308
Replacement 536 thermocouple gauge, DN 25 ISO-KF	L6141309
Replacement 536 thermocouple gauge, DN 16 CFF (1.33 CFF)	L6141305

NOTE All units include set points, RS232 and analog output.



WWW.JEVINSTRUMENTS.COM

Contact information

Americas

Agilent Technologies
121 Hartwell Avenue,
Lexington, MA 02421 USA
Toll free: +1 800 882 7426
vpl-customer@agilent.com

Europe, Middle East, Africa, India

Agilent Technologies Italia SpA
Via F.lli Varian 54,
10040 Leini (Torino), Italy
Tel: +39 011 9979 111
Toll free: 00 800 234 234 00
vpt-customer@agilent.com

China

Beijing Office Agilent Technologies (China) Co. Ltd.
No.3, Wang Jing Bei Lu,
Chao Yang District,
Beijing, 100102, China
Toll free: 800 820 6778
Contacts.vacuum@agilent.com

For more information, please contact
your Agilent representative or visit
www.agilent.com/chem/vacuum where
you can chat live with a vacuum expert.



<https://www.agilent.com/en/product/vacuum-technologies/vacuum-measurement/gauge-controllers/rgc-150-rough-vacuum-gauge-controller>

DE44449.4967013889

This information is subject to change without notice.

© Agilent Technologies, Inc. 2021
Printed in the USA, September 21, 2021
5994-4135EN

