






# DS 202 Rotary Vane Pump



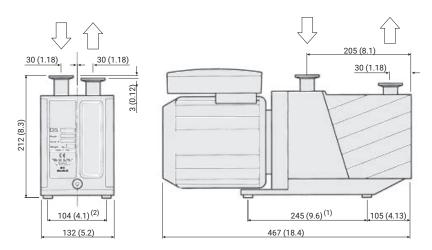

Alternative mounting holes are also available, with (1) = 226 (8.9) and (2) = 98 (3.8), with hole  $\emptyset$  = 7 (0.3)

Dimensions: millimeters (inches)


The DS 202 is a dual-stage oil-sealed rotary vane pump that delivers a pumping speed of 8.3 m $^3$ /h at 50 Hz, or 5.8 CFM at 60 Hz, and a base pressure of  $<2 \times 10^{-3}$  mbar. The DS 202 has a low sound pressure, and has a universal-voltage single-phase electric motor, with integral power switch.

An inlet isolation valve is integrated into the pump to close off the inlet port whenever power to the pump is interrupted. This antibackstream valve retains vacuum in the roughing, or foreline, and prevents pump oil from contaminating the vacuum chamber. The DS 202 has a manual gas ballast valve, which when opened, allows the pump to achieve its rated water vapor handling specification.

# **Technical specifications**

Free Air Displacement	60 Hz: 192 L/min (6.8 cfm)	50 Hz: 160 L/min (9.6 m³/h)
Pumping Speed*	60 Hz: 5.8 cfm	50 Hz: 8.3 m <sup>3</sup> /h
Ultimate Partial Pressure*	10 <sup>-4</sup> mbar	
Ultimate Total Pressure*	2 × 10⁻³ mbar	
Ultimate Total Pressure With Gas Ballast*	2 × 10 <sup>-2</sup> mbar	
Water Vapor Tolerance	15 mbar	
Water Vapor Capacity	100 g/h	
Oil Capacity Min/Max	0.25/0.6 L	
Motor Rating 1 ph	60 Hz: 0.72 kW	50 Hz: 0.72 kW
Nominal Rotation Speed	60 Hz: 1,800 rpm	50 Hz: 1,500 rpm
Weight	25 kg (55 lb)	
Inlet Flange	DN 25 ISO-KF	
Exhaust Flange	DN 25 ISO-KF	

<sup>\*</sup> According to PNEUROP 6602

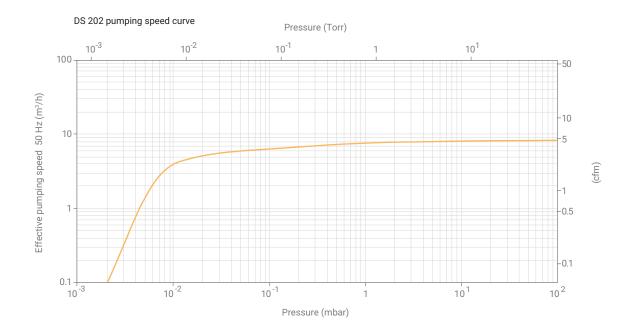



## **Ordering information**

Description	Part Number	
Dual Stage Rotary Vane Pump: DS 202 with 1 Phase Worldwide Motor*  * 1-phase motors (100 to 120/200 to 230) V ±10%, 50/60 Hz. All motors comply with CE and UL/CSA standards.	9499320	
Maintenance Kits		
Minor Maintenance Kit: Contains all the Valves, O-rings, and Seals to Refurbish the Pump to Vacuum Integrity	9499370	
Major Maintenance Kit: Includes all the Items of the Minor Kit Plus the Vanes	9499381	
Oil and Accessories		
Rotary Vane Fluid, DS19 Type, 1 Liter	9499390	
Rotary Vane Fluid, DS19 Type, 1 Liter (USA)*	K7516301	
Rotary Vane Fluid, DS19 Type, 1 Gallon (USA)	K7516302	
Oil Mist Eliminator	9499395	
Oil Mist Replacement Cartridge (Pkg. of 2)	9499394	
NW 25 Oil Exhaust Filter	9499392	
NW 25 Oil Exhaust Replacement Cartridge	9499342	
Oil Return Kit	9499376	
Oil Drain Extension	9499375	
European Plug Power Cable 2 Meters 1 ph	9499396	
USA Plug Power Cable 2 Meters 1 ph	9499397	
UK Plug Power Cable 2 Meters 1 ph	9499398	
NW 25 Centering Ring Viton	KC25AV	
NW 25 Aluminum Clamp	KQ25AWP	

<sup>\*</sup> When these pumps are used in Leak Detectors applications, we recommend the use of Rotary Vane Fluid (Elite-Z mechanical, part number 695409005) as it features a lower vapor pressure.

www.agilent.com/en/ product/vacuum-technologies/oilsealed-rotary-vane-pumps/dualstage-ds-rotary-vane-pumps/ds-202rotary-vane-pump

DE44337.2669560185

This information is subject to change without notice.

© Agilent Technologies, Inc. 2021, 2023 Printed in the USA, April 3, 2023 5994-3541EN

## **Contact information**

### **Americas**

Agilent Technologies 121 Hartwell Avenue, Lexington, MA 02421 USA Toll free: +1 800 882 7426 vpl-customercare@agilent.com

### Europe, Middle East, Africa, India

Agilent Technologies Italia SpA Via F.lli Varian 54, 10040 Leini (Torino), Italy Tel: +39 011 9979 111 Toll free: 00 800 234 234 00 vpt-customercare@agilent.com

### China

Beijing Office Agilent Technologies (China) Co. Ltd. No.3, Wang Jing Bei Lu, Chao Yang District, Beijing, 100102, China Toll free: 800 820 6778 Contacts.vacuum@agilent.com

For more information, please contact your Agilent representative or visit www.agilent.com/chem/vacuum where you can chat live with a vacuum expert.





